




HydraSmart Cabinet Softener

	Mini	Medium	Maxi
			
Model Name	PWCE16P12	PWCE35P12	PWCE54P12
Part Number	SA10681	SA10683	SA10685
Operating Pressure	0.14-0.35 Mpa	0.14-0.35 Mpa	0.14-0.35 Mpa
Size (W*D*H)	314*446*739mm	309*446*1228mm	273*273*1617mm(soften body) 323*323*1000mm(brine cabinet)
Media	Softener Cation Resin		
Flow Rate	1.1 m ³ /hour	2 m ³ /Hour	3 m ³ /hour
Resin Volumes	12 Liter	30 Liter	42 Liter
Tank Model	1016	1035	1054
Valve Model	Autotrol-368/606F		
Valve-Pipe Size	1"-BSPT		
Transformer	Europe WallTrans-240V		
Controller type	368-Automatic 706 Control		




HydraSmart Cabinet Softener – Features


HydraSmart - PWCE16P12 & PWCE35P12

Special Cation Exchange Resin

High Performance Fiberglass & Resin Tank

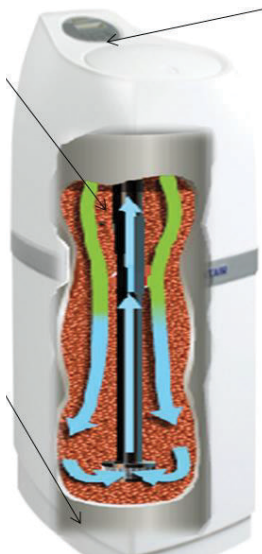

Smart Control Valve with Simple operation
(Fully Automatic Regeneration)

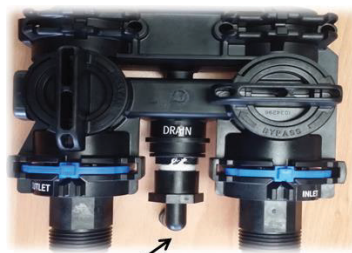

Bypass Valve



Careful & thoughtful design with silver belt plating

HydraSmart - PWCE54P12



Bypass valve function as a softener standard. With bypass valve, installation and maintenance is more convenient. Can be mixed on request, adjust the water hardness. Significant savings in equipment regeneration times.

High intelligent control valve body memory customer Usages, fully automatic regeneration control.

Dry salt storage of salt reserves, water before regeneration, to ensure salt water sanitation.



High Grade Resin The eight-step regeneration method maximizes salt utilization relative to the standard five-step regeneration method while significantly reducing the regenerated water consumption. Annual savings of about \$300



CORPORATE OFFICE

Green Boulevard
B-9/A, 7th Floor, Tower B
Sector 62, Noida-201301
Phone: + 91 120 419 9444
Fax: +91 120 419 9400

REGISTERED OFFICE

& MANUFACTURING FACILITY
L/52-55, Verna Industrial Area
Verna, Goa - 403 722
Phone: +91 832 675 4400
Fax: +91 832 288 3312

pentair.com